ASTRONERGY



ASTRO N7s 2.0

CHSM48RN(DG)(BLH)/F-BH
Bifacial Series


450~465W

Assist carbon neutrality

Warranty

25 25-year Product Warranty

30 30-year Linear Power Warranty

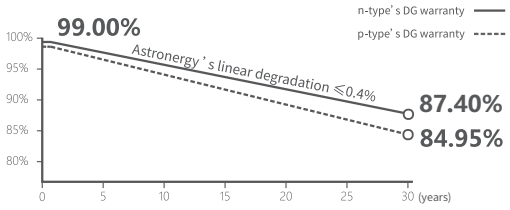

n-type TOPCon 5.0
Newly upgraded cell technology, ultra-high product energy efficiency

ZBB Design
Zero-busbar integrated interconnection

Sleek Design
< 2 ㎡ area, easy to transport and install

All-black Technology
Sleek crystalline black appearance, seamlessly blending into rooftops

IEC 61215, IEC 61730
ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety
The first solar company which passed the Nord IEC/TS 62941 certification audit

TOP PERFORMER 2025 kiwa PV MODULE RELIABILITY SCORECARD

Tier 1 BloombergNEF


Underwritten by International Insurer

450~465W	0~+3%	23.3%	≤ 1.0%	≤ 0.4%
POWER RANGE	POWER SORTING	MAX MODULE EFFICIENCY	FIRST YEAR POWER DEGRADATION	YEAR 2-30 POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	1762 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	96 (6*16)
Frame technology	Aluminum, black anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Landscape: 1200 mm
Cable diameter (IEC/UL)	4 mm^2 / 12 AWG
① Maximum mechanical test load	6000 Pa (front) / 4000 Pa (back)
Connector type (IEC/UL)	MC4-EVO2A
Module weight	24.5 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	927 kg
Modules per 40' HQ container	936 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

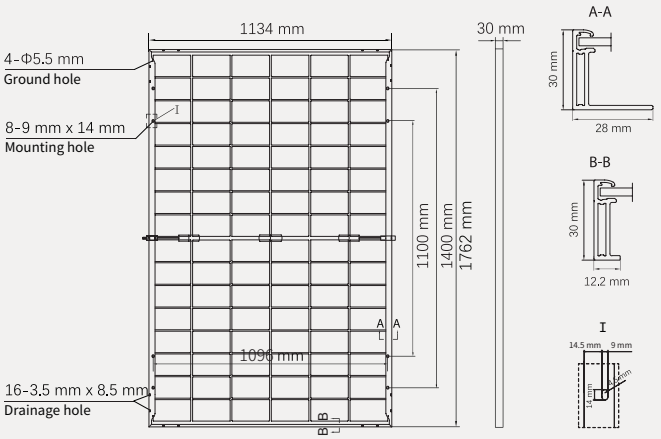

Electrical Specifications


STC: Irradiance 1000W/m^2, Cell Temperature 25° C, AM=1.5, Power measurement tolerance: ±3%


Rated output (Pmpp / Wp)	450	455	460	465
Rated voltage (Vmpp / V)	30.51	30.65	30.78	30.80
Rated current (Impp / A)	14.75	14.85	14.94	15.10
Open circuit voltage (Voc / V)	36.59	36.75	36.91	36.93
Short circuit current (Isc / A)	15.61	15.71	15.81	15.84
Module efficiency	22.5%	22.8%	23.0%	23.3%


BNPI: Irradiance: front 1000W/m^2, rear 135W/m^2, Cell Temperature 25° C, AM=1.5

Rated output (Pmpp / Wp)	495.9	501.4	506.9	512.4
Rated voltage (Vmpp / V)	30.52	30.66	30.79	30.81
Rated current (Impp / A)	16.25	16.35	16.46	16.63
Open circuit voltage (Voc / V)	36.60	36.76	36.92	36.94
Short circuit current (Isc / A)	17.28	17.39	17.50	17.53

Curve

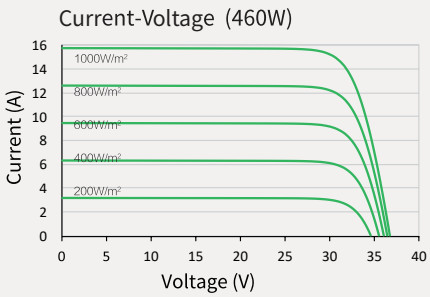

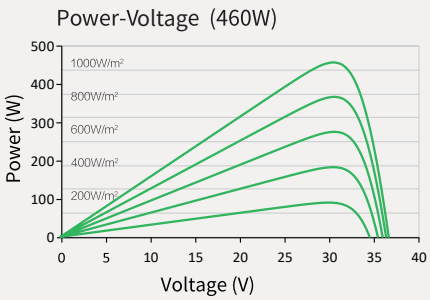

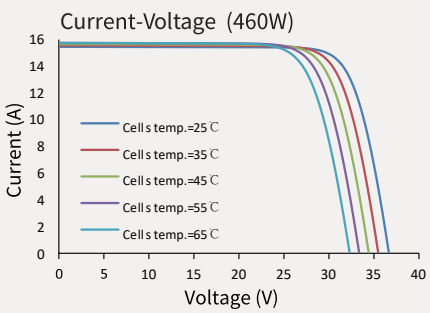

Temperature Ratings (STC)

Temperature coefficient (Pmpp)	-0.29%/°C
Temperature coefficient (Isc)	+0.043%/°C
Temperature coefficient (Voc)	-0.25%/°C

Operating Parameters

Operating Temperature	-40°C ~+85°C
Bifaciality (Pmpp)	80±5%
Junction box IP rating	IP 68
Max. series fuse rating	30 A
Max. system voltage (IEC/UL)	1500V_{DC}

© Chint New Energy Technology Co., Ltd. Reserves the right of final interpretation. please contact our company to use the latest version for contract.
www.astronergy.com

SCANOFFICE SOLAR
Juvanmalmintie 11, 02970 Espoo
info@scanoffice.fi
www.scanoffice.fi